



Vision Turbine meter

Turbine Flow Meters

Vision Series 3000

DESCRIPTION

The small turbine meter VISION measurement technology is ideal for the accurate measurement of low viscous and non-aggressive fluids. The VISION 3000 series is most suited for the measurement of flow rates from 5 to 65 l/min. The turbine meters can be mounted in any position.

MEASURING PRINCIPLE

Turbine meters are indirect volumetric meters. When the fluid passes through, a rotor is activated and the movement is either electronically or mechanically transmitted outside. The rotor is turned by the fluid force, proportional to the flow rate. A Hall effect sensor detects the passage of the rotor and supplies pulses, which can be utilized for digital or analogue signal processing. The generated pulses are specified as the K-factor. The large number of pulses provides high resolution. As the mass of the turbine is very small the response time is very short. It is not necessary to install a straight length of pipeline at the upstream side of the meter.



SPECIFICATIONS

Type	VISION 3012
-------------	-------------

Performance	
Flow rate	5 – 65 l/min
Accuracy	± 3% of reading
Repeatability	< 0.5% under the same operating conditions
Operating temperature	-20°C to 100°C
Operating pressure rate	max. 25 bar
Burst pressure	200 bar

Pick up					
Pulse sensor	Hallsensor				
Input power	5 – 24 VDC				
Output signal	Open collector (NPN sinking) @ max. 20 mA, 1-2.2 kOhm pull up resistor required				
Power consumption	approx. 8 mA				
K-factor	Version	Material	Nominal size	Flow range	K-factor
	VISION 3012	Trogamid CX7323	12 mm	5 – 65 l/min	210 pulse/liter



Badger Meter

Material	
Housing	Trogamid CX7323
Rotor	PPS Ferrite bound
Bearings	2x Hostaform, Ball bearings


Fluids	
Viscosity	0.8 – 16 mm ² /sec (mPas/CST)
Fluid type	Liquids
Filter	20 to 40 micron recommended

Installation	
Nominal size DN	12 mm
Mounting position	In any orientation
Electrical connection	3 Pin (2.8 x 0.5) for MINI DIN Connector, EN 60529 Round cable 3 x AWG 24 with free cable ends
IP Protection class (DIN Connector)	IP67
Mechanical connection	G 3/4", NPT 3/4"
Tightening torque for screwed connection	approx. 6 Nm


Weight			
	Housing	Connector	Weight
	Trogamid CX7323	DIN	35 g
	Trogamid CX7323	1 m cable	50 g

Approvals		
	Housing	Approvals
	Trogamid CX7323	KTW, ROHS, CE


PRESSURE DROP

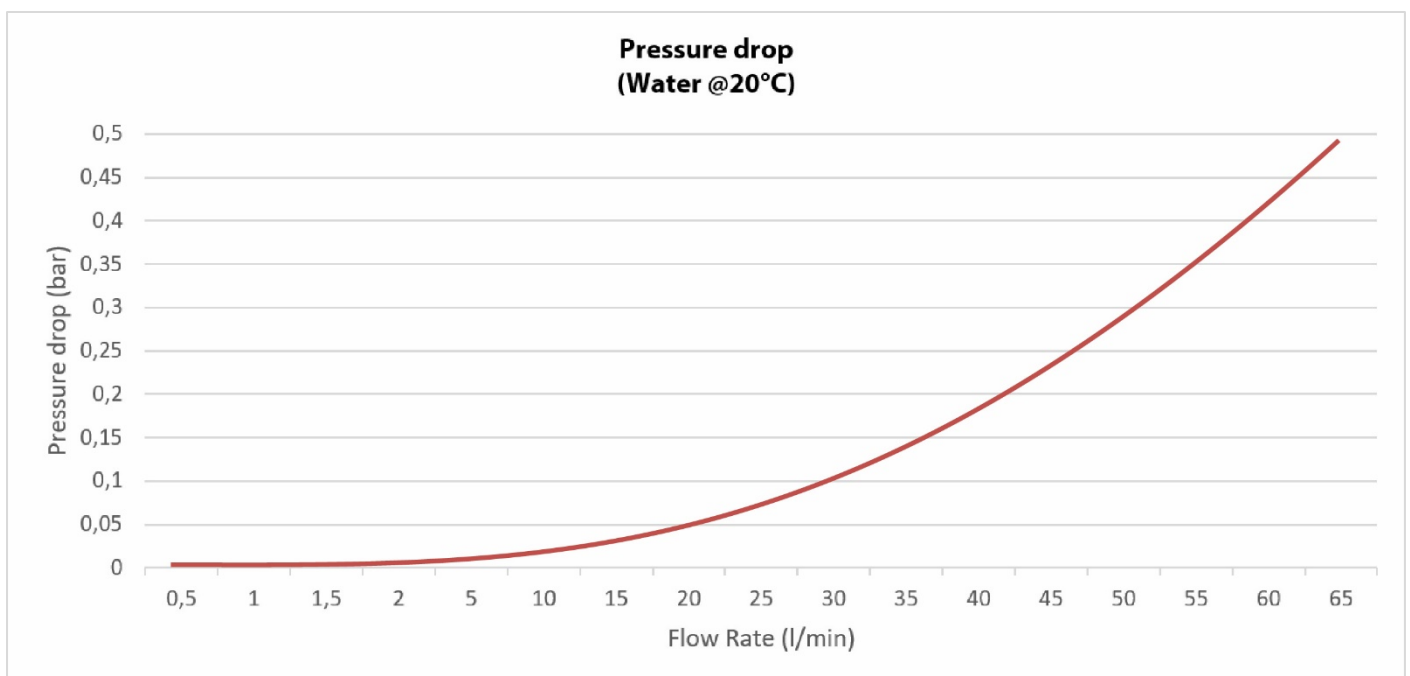

DRAWINGS

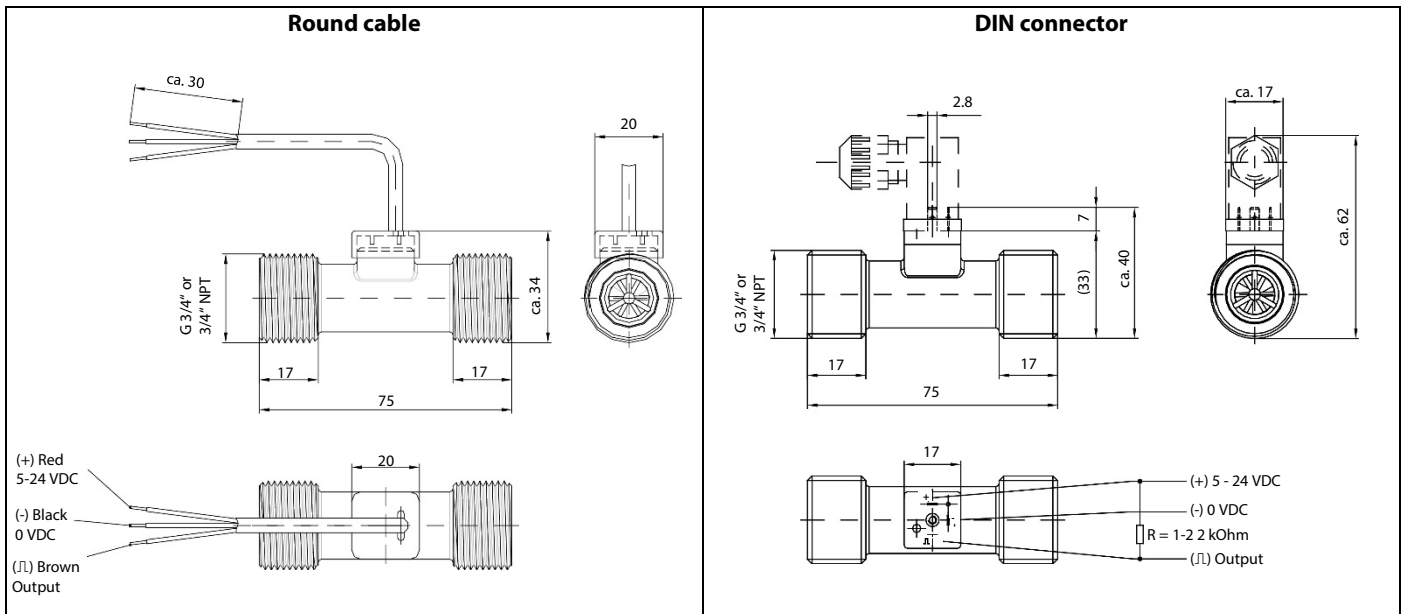

ELECTRICAL WIRING

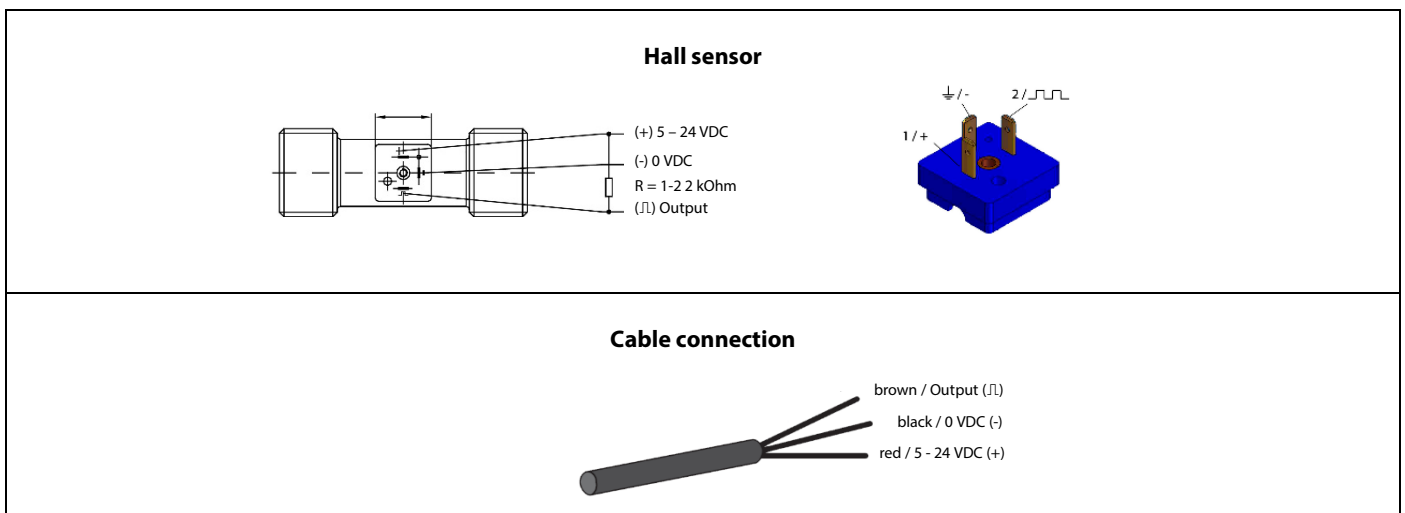

ORDERING MATRIX - VISION 3000

Select process and electrical connection	Code			
Mechanical connector:				
G 3/4" Trogamid	56422			
NPT 3/4" Trogamid	56423			
Electrical connection:				
DIN connector			-163	
Cable – select cable length, see option			-165	
Turbine model:				
VISION 3012				-4F16
Option cable length:				
1 m (standard)				-1
2 m				-2
3 m				-3
Examples:	Code			
VISION 3012 G 3/4" with DIN connector	56422	-163	-4F16	
VISION 3012 G 3/4" with 1m cable	56422	-165	-4F16	-1
VISION 3012 G 3/4" with 2m cable	56422	-165	-4F16	-2

Control. Manage. Optimize.

Dynasonics, AquaCUE and SoloCUE are registered trademarks of Badger Meter, Inc. Other trademarks appearing in this document are the property of their respective entities. Due to continuous research, product improvements and enhancements, Badger Meter reserves the right to change product or system specifications without notice, except to the extent an outstanding contractual obligation exists. © 2021 Badger Meter, Inc. All rights reserved.