Line pressure regulator L 3/4





Fittings and gauges optional

TECHNICAL DETAILS

Material: Brass or

stainless steel (1.4404)

Valve seat: Ø 10

Cv-value: 2,0

Seat: EPDM or FKM Diaphragm: EPDM or FKM

Max. inlet pressure: 110 bar

Outlet pressure

ranges: 0,5 - 3 bar

0,5 - 6 bar 1 - 10 bar 1 - 20 bar 5 - 70 bar 5 - 100 bar

Operating temp.: -40°C to +150°C

Dimensions: Ø 93 x 186 mm

Weight: 4,8 kg

Connections: Inlet / outlet

G 3/4" or NPT 3/4" Gauge NPT 1/4"

APPLICATION AREA

Depending on applied materials, this pressure regulator is applicable for different gases and liquids.

We urgently recommend the connection of a fine filter with max. 40 μ at the inlet of the pressure regulator. Subsequent components and plant components must be protected by separate safety valves.

DESCRIPTION

The line pressure regulator L 3/4 is characterised by an accurate regulation and a large throughput.

The spring loaded pressure regulator works according to the principle of the force equilibrium between the adjusted spring force and the outlet pressure.

It can be equipped optionally with an inlet and an outlet gauge.

QUALITY STANDARD


The company Hornung is certified to **DIN EN ISO 9001:2015** and **ISO 14001:2015**. All single parts are manufactured, assembled and tested by in-house production. The finished parts are therefore under all criteria of German quality control with 100% final inspection.



Rathenaustraße 55 63263 Neu-Isenburg

Phone: +49 6102 7883-70 Fax: +49 6102 7883-40

www.hornung.org info@hornung.org

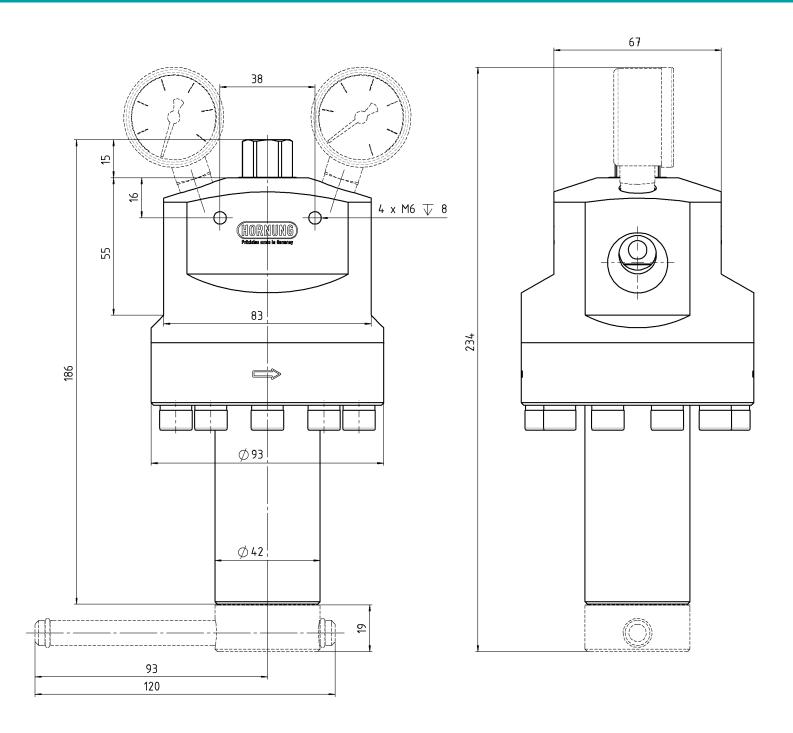

VERSION

A large independence from fluctuation of the inlet pressure is reached with a balanced poppet.

The use of high-grade steel in connection with elastomer made of FKM permits the application of this pressure regulator with aggressive media.

ORDER DETAILS			
Material:Diaphragm:1 = brass1 = EPDM2 = stainless steel2 = FKM	Outlet pressure P2: 1 = 0,5 - 3 bar 2 = 0,5 - 6 bar 3 = 1 - 10 bar 4 = 1 - 20 bar 5 = 5 - 70 bar 6 = 5 - 100 bar	Gauges: 0 = none 1 = with inlet and outlet gauge	Inlet / outlet: 0 = G 3/4" - Internal thread 1 = NPT 3/4" - Internal thread
Regulator type 330- L 3/4	330- 2 1 Type Material Diaphra	3 1 igm P2 Gauge	1 Gas type s In-/outlet Gas type

Accessories: see total catalogue segment

- 7. Gauges, fittings and accessories
- 8. Fein filter F1, safety valves available on request