

KYTOLA® OVAL D2 Measuring Station is designed to monitor oil flow rates measured by Model SR oval gear meters in circulation lubrication systems.



UPGRADE

MEASURING STATION OVAL D2

- Communication with upper level systems
- In excess of 100 measuring stations and thousands of measuring points in one serial line
- Modbus RTU or Kytola KVM protocol
- Serial interface RS485/RS422
- USB port for local configuration
- Measuring units: L/min, pulses/min, PPM or USGPM
- Kytola coil or NAMUR sensor

The OVAL D2 measuring station operates as an independent station, or it can be connected to Kytola KVM Control monitoring software or to customer's PLC or DCS via Modbus RTU protocol.

FEATURES

Painted or stainless steel enclosure, IP 65

Local display and keyboard

Alarm relays, inhibits, and groups

TYPICAL APPLICATIONS

Lubrication oil flow monitoring

Industrial flow monitoring

Process control

OVAL D2

TECHNICAL DATA

Model	OVAL D2
Enclosure	Painted steel (*stainless steel AISI 316), IP65
Supply voltage	24 VDC \pm 25% / 0.6A or 110–240 VAC / 50–60Hz
Ambient temperature	-20°C...+60°C (relative humidity < 85%, non-condensing)
Display	4 x 20 characters and 4 pushbuttons
Communication	Modbus RTU or KytolaKVM (RS485/RS422) protocol
Measuring points / station	Max. 64 points with Modbus RTU protocol or max. 48 points with KytolaKVM protocol
Alarm relays	3 potential-free relays for high-flow, low-flow, and very-low-flow alarms + 1 programmable relay
Alarm inhibition inputs	3 optoisolated inputs to prevent alarms
Sensor types	Kytola coil or NAMUR sensor; DIN 19234


*On special request

OVAL D2-

Number of Measuring Points	
16	16
32	32
48	48
64	64

Power Supply	
24 VDC \pm 25% / 0.6 A (standard, leave empty)	
110–240 VAC / 50–60 Hz	

*Stainless steel enclosure on request

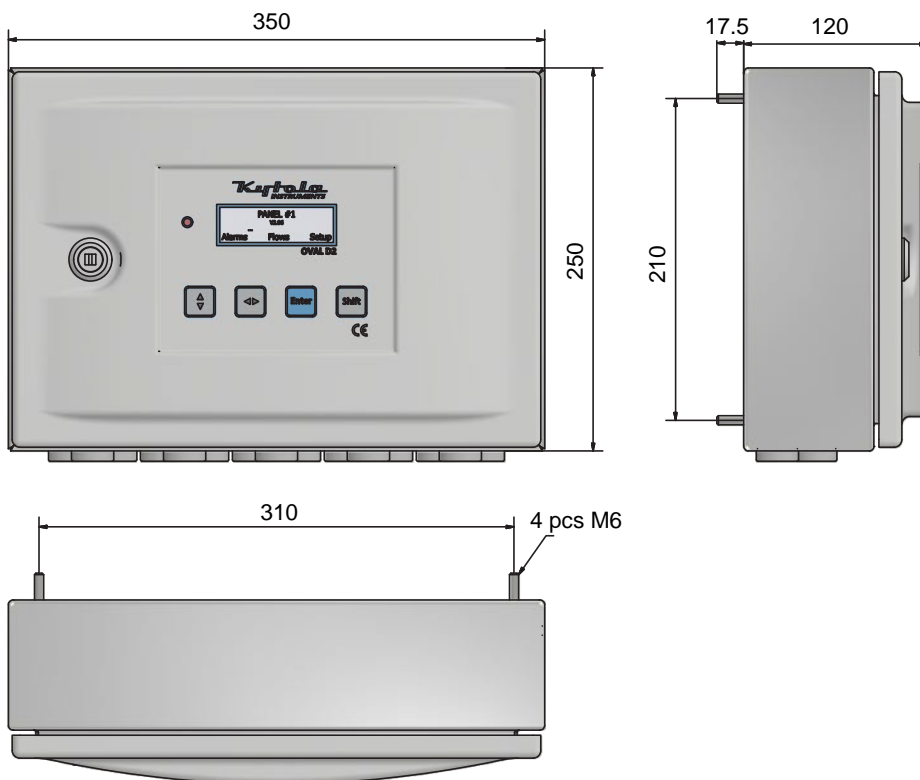

OVAL FLOW panel with OVAL D2 and SR6 meters



www.kytola.com



Kytola Instruments Oy
 Olli Kytölän tie 1
 FI-40950 Muurame, Finland
 Tel. +358 20 779 0690
 Fax +358 14 631 419
 E-mail info@kytola.com